lightswing®




Instruction manual Lightswing® Zero

What you need




Screwdriver




Pencil



Drill or crewdriver

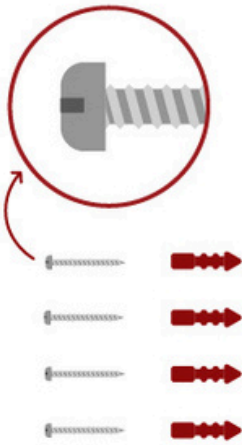

Screws and plugs. (**not** included). We recommend 4 universal cylinder-head screws of 4/4.55 mm.

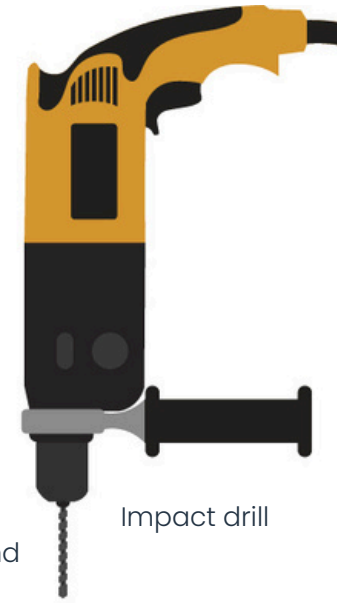

Impact drill

Online manual including installation video: www.lightswing.eu/manual

Introduction

As of today, you can effortlessly turn your pendant light 360°. With the help of this manual, we will walk you through this 7 easy installation steps.

Important before you get started

- The Lightswing® is delivered complete and pre-assembled
- The Lightswing® is a high-quality product that requires no maintenance
- The warranty period is two years, as defined in our terms and conditions (www.lightswing.eu/terms-and-conditions)

Technical specifications

Turn range	360°
Suitable for a dimmer	Yes
Suitable for a LED-driver or transformer	Yes
Suitable for damp places	Yes
Including light source	No
Distance between sliding nuts	3.5 - 8 cm
Maximum weight pendant light	10 kg
Dimensions	17.5 x 1.7 cm
Weight Lightswing® Zero	0.4 kg

In your package

Lightswing® Zero




Screws (step 6)



Drill bit (step 4)



Base plate

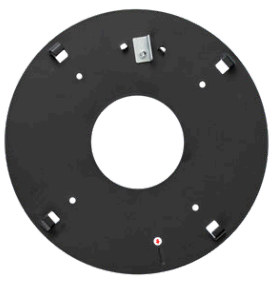

Cover



Step 1

Remove the screw on the side of the cover.
Hold the cover and rotate the base plate to the left to release it.







Step 2

• Mark the drill holes on the ceiling. Use the round, pre-drilled holes of the base plate.
Note: If you install the Lightswing® Zero in a random location and the cable comes from the side, make sure the red arrow on the base plate aligns with the cable.
• Drill the marked holes with a 4 mm drill and insert plugs.

Drill holes

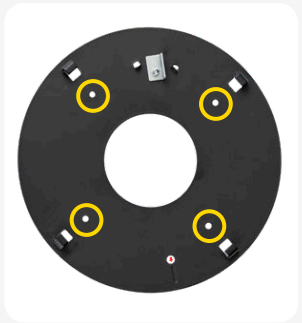

Red arrow mark

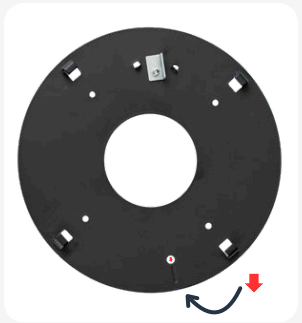

Step 3

Secure the base plate with 4 universal cylinder-head screws of 4/4.55 mm.
Note: Installing the Lightswing® Zero over an electrical junction box or electrical cable? First thread the cables through the center hole.

Step 4

Check if the bracket from your pendant light fits on the Lightswing® Zero. Position the holes in the bracket of your pendant light over the holes from the sliding nuts. Does the bracket fit?
YES: proceed to step 5.
NO: mark the furthest position of the sliding nuts on the bracket and thrill the holes, using the provided drill bit.

Sliding nuts



Step 5

• First attach the cover plate to the base plate.
Note: Are you installing the Lightswing® Zero at a random location?
YES: Push out the cut-out marked on the cover plate with a red arrow and guide the cable through it.
NO: First guide the cables through the central hole. Slide the yellow cover blocks onto the hooks of the base plate, turn them to the right to lock, and reinsert the screw.

Cut-out



Step 6

Screw the bracket of your pendant light on the sliding nuts of the Lightswing® Zero, using the included screws.

Step 7

Follow the mounting instructions of your pendant light.