




Installation Manual Lightswing® IKOAN pendant


Tools to keep at hand



Pencil or
marker



Flat-head &
Phillips
screwdriver

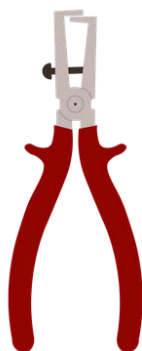

Wire stripper




Introduction

Thank you for purchasing a Lightswing® IKOAN pendant! With this manual we will walk you through the installation steps together.

Important before you get started

- ✔ Switch off the power before installing the lamp.
- ✔ Follow these instructions carefully to ensure correct installation.
- ✔ Electrical installation may need to be carried out by a qualified electrician. Check local regulations.
- ✔ Do not modify the product. Lightswing® is not responsible for modified or altered products.
- ✔ For indoor use only.
- ✔ Clean with a soft damp cloth and mild detergent, or a dry microfiber cloth. Do not use alcohol, solvents or abrasive materials.
- ✔ The product requires no maintenance.
- ✔ The warranty period is two years, subject to our Terms & Conditions: www.lightswing.eu/terms-and-conditions
- ✔ Register your product for an extended warranty: www.lightswing.eu/installation-manual


What's in the box

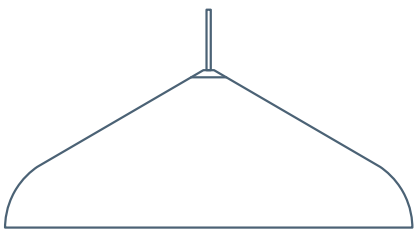

Lightswing® IKOAN
pendant



E27 Globe opal
LED bulb 2700K



Canopy

Need a new light bulb in the future?

Our light bulbs are specially designed for this pendant light and are exclusively available at the Lightswing® website.

Technical Specifications

Lightswing® IKOAN pendant	Medium	Large
Light source included	Yes	Yes
Pendant dimensions	Ø 35 cm	Ø 50 cm
Cord length	1,5 m	1,5 m
Weight	0,95 kg	1,66 kg
Material	Aluminium	Aluminium
Dimmable	Yes	Yes

Choose your installation


Decide whether you want to mount the IKOAN directly to the ceiling or attach it to a Lightswing®.

A. Installation on a Lightswing®


- Determine the desired drop height for your lamp, and mark that point on the cord.

Tip: above a dining table we recommend about 75 cm between table and lamp.

- Cut the cord ~10 cm above the mark.
- Tape the end of the textile cord to prevent fraying.
- Remove the outer jacket to expose ~4 cm of the internal wires.
- Strip ~0.5 cm of insulation from each wire.
- Loosen one screw of the Quick Release strain relief and remove the other. Feed the cord through.
- Connect the wires to the terminal block.
- Secure the cord with the strain relief.
- Slide the Quick Release into the Lightswing®.


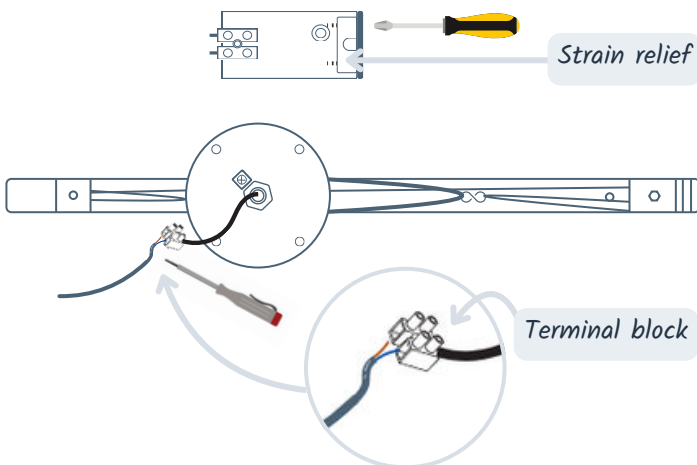


- Connect as shown on diagram. The wires should be fed through the terminal block and the screws tightened to hold them in place.
- After feeding the cord, tighten the strain relief again.
- Once your lamp is attached to the Quick Release, slide it back into the Lightswing®.

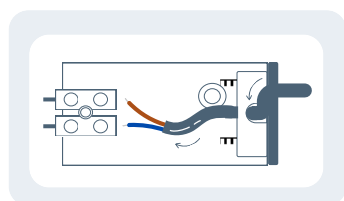


B. Direct ceiling installation

1. Over a junction box
2. Over an existing ceiling cable

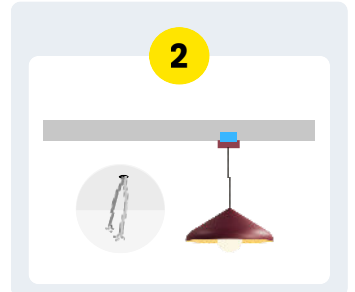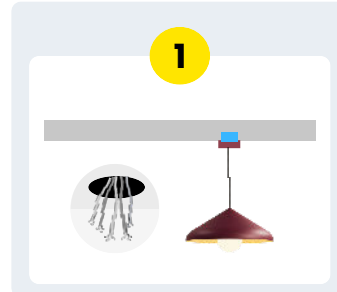

1. Over a junction box

- Attach the canopy bracket to the junction box.
- Connect the wires to the terminal block.
- Place the canopy over the bracket and secure it.

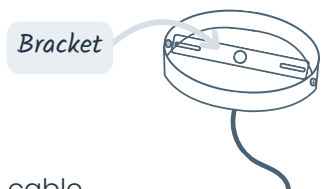

2. Over an existing ceiling cable

- Mark and drill two holes for the canopy bracket.
- Attach the bracket to the ceiling using suitable screws and plugs.*
- Connect the wires to the terminal block.
- Place the canopy over the bracket and secure it.

*Suitable screws and plugs are not included.